


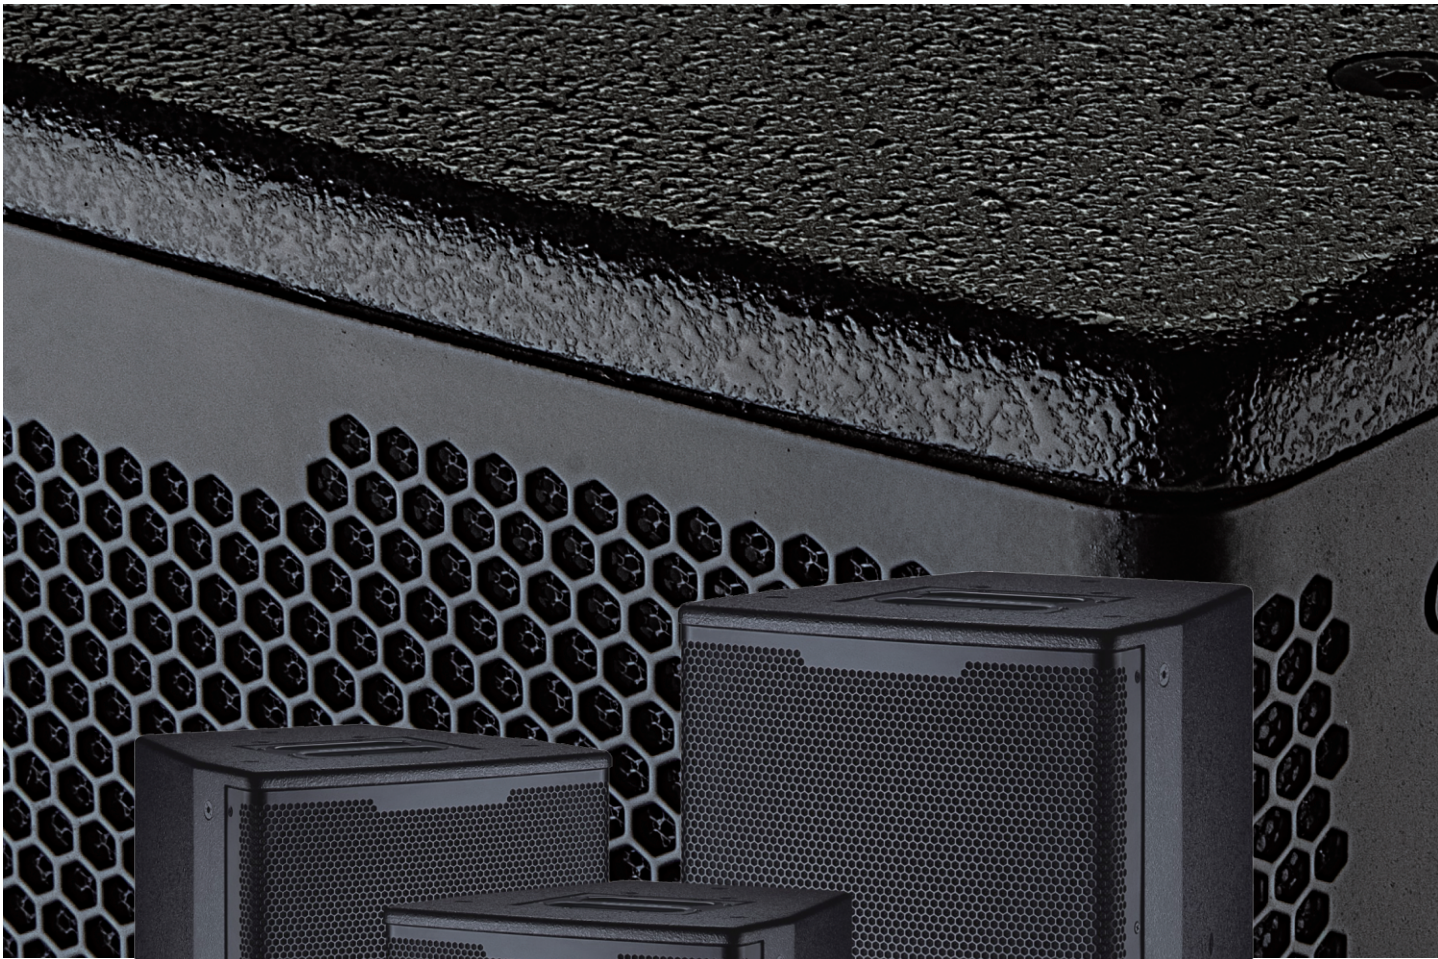

KP SERIES
专业娱乐会议音箱系列

功能特点 Features:

KP 系列是一款多边形内嵌二分频音箱，设计用于各种流动的语言和音乐扩音的应用场合，同样可以应用在各种固定安装场合，此梯形箱体侧边30°可做主扩也可做地面返送。结合一个内置无源分频器，分频器高频部分使用衰减电阻，不会出现大功率状态下烧高音的问题，同时增加了系统的阻尼系数和音响效率。提供6个M8吊挂点，用于固定安装和流动应用中吊挂和调节角度。并有一个35毫米支架孔座。箱体由18mm夹板构成，表面为耐磨点纹油漆。两个与箱体平齐内嵌的把手安装在音箱两侧，方便搬运；后接线板两个并联的四芯SPEAKON插座方便连接，黑色的穿孔铁网保护音响单元。

KP series is a multilateral ladder built-in two frequency speaker, designed for a variety of mobile language and music expansion applications, the same can be applied in a variety of fixed installation occasions, the side of the ladder side of the box 30 degrees can be used to do the ground to return to the ground. Combined with a built-in passive frequency divider, frequency divider high-frequency part of the use of bad reducing the resistance, will not appear in the high power state of the burning of the problem, while increasing the damping coefficient of the system and the sound field efficiency. Provides 6 M8 hanging points, for fixed and mobile application in suspension and adjust the angle. And there is a 35 mm bracket hole seat. The box by 18mm clamping plate, the surface wear-resistant paint dot. The two and the box body is flush with the handle installed on both sides of the sound box, which is convenient for carrying; the rear connecting plate is connected with four parallel connection two core SPEAKON sockets. Colored perforated iron mesh protection unit.

技术参数 Technical Parameters:

型号MODEL:	KP-610	KP-612	KP-615
组件Components	LF 1 X10" (250mm)	LF 1 x12" (300mm)	LF 1 x15" (380mm)
	HF 1X1.75" (44mm)	HF 1x1.75" (44mm)	HF 1x1.75" (44mm)
连接器Connectors:	2XNEUTRIK N14	2xNEUTRIK N14	2xNEUTRIK N14
频率响应Frequency Response:	60Hz-20kHz ± 3d	60Hz-20kHz ± 3d	60Hz-20kHz ± 3d
灵敏度Sensitivity(IW/1 M):	95dB	95dB	97dB
最大声压Maximum sound pressure:	119dB	126dB	128dB
额定功率Rated Power:	300W	350W	450W
标称阻抗Nominal Impedance:	8Ω	8Ω	8Ω
尺寸规格(H × W × D):	520X300X290 (mm)	612X375X370 (mm)	690X420X450 (mm)

应用领域 Applications:

适用于礼堂、演艺大厅、体育场馆、大会议厅、多公能厅、KTV、俱乐部、DISCO主扩声、中小型流动演出扩声。





MA SERIES

专业音箱系列



功能特点 Features:

- ◎应用大功率的低音单元，号角负载钛合金膜，压缩式驱动单元。
- ◎建议配套超低音系统组合使用。
- ◎集多年研究经验，体现M. R对声音、音乐和工程应用的最新理解，是经过反复论证而成的最新产品。
- ◎体积小、声音清晰、圆润细腻，有良好的连贯性，而且，最高达400W的承受功率，具有惊人的输出声压，是为满足高层应用需要而开发的高端产品。
- ◎双用途设计，能兼顾主扩声和舞台监听两种的使用。灵活的吊挂系统，方便横置或竖立安装。
- ◎音箱底部配有支撑竿座，可以用支架支撑安装输入接口是四芯瑞士NEUTRIK SPKON标准插座，确保可靠的电气接触。

技术参数 Technical Parameters:

型号MODEL:	MA-10	MA-12	MA-15
额定功率	300W	400W	500 W
频率响应	75Hz - 19kHz	60Hz - 18kHz	55 Hz - 18kHz
标称阻抗	8 Ω	8 Ω	8 Ω
灵敏度(1w/lm)	99dB	99 dB	98dB
连续声压级(1w/lm)	125 dB	连续声压级(1w/lm) 125 dB	125 dB
最大声压级(1w/lm)	129dB	131dB	131dB
辐射角度(HxV)	100°/50° x40°	60°x40°	60° x40°
规格（高×宽x深）	520x 310x 280(mm)	634x 370x 340(mm)	717x 442x 383(mm)
净重	16kg	28kg	42kg
单元规格LF	10"HF: 1.4"Driver	12"HF: 1.4"Driver	LF: 15" HF: 1.7"Driver
箱体材料	全桦木胶合板	全桦木胶合板	全桦木胶合板
吊装系统	三点吊挂系统	三点吊挂系统	三点吊挂系统
面网	1.5mm穿孔钢板， 背贴声学透声海绵	1.5mm穿孔钢板， 背贴声学透声海绵	1.5mm穿孔钢板， 背贴声学透声海绵
输入接口	Neutrik NL4MP x 2	Neutrik NL4MP × 2	Neutrik NL4MP × 2
外观颜色	黑色颗粒状环保水性喷涂（默认）		

应用领域 Applications:

适用于大型厅堂，如多功能厅、中小型剧场、室内演艺等。





功能特点 Features:

F+作为独立的全频音箱，免去了外置分频驱动的麻烦，高频压缩驱动器安装在一个持续指向性90度X50度号角上。高频号角可以转动，使得多角度的箱体既能水平放置也可以垂直放置。令系统更加简洁。适用于户外流动扩声系统，室内SHOW吧、慢摇吧及固定安装系统等场所使用。

技术参数 Technical Parameters:

型号MODEL:	F-10+	F-12+	F-15+
组件Components	LF 1 X10" (250mm) HF 1X1" (34mm)	LF 1 X12" (300mm) HF 1X1.75" (44mm)	LF 1 X15" (380mm) HF 1X3" (75mm)
连接器Connectors:	2xNEUTRIK NL4	2xNEUTRIK NL4	2xNEUTRIK NL4
频率响应Frequency Response:	60Hz-20kHz ± 3dB	60Hz-18kHz ± 3dB	60Hz-18kHz ± 3dB
灵敏度Sensitivity(IW/IM):	97dB	98dB	101dB
最大声压Maximum sound pressure:	125dB	126dB	129dB
额定功率Rated Power:	250W	300W	400W
最大功率Maximum power:	600W	800W	1200W
覆盖范围H F Dispersion:	90° x 50°	80° x 50°	80° x 50°
标称阻抗Nominallmpedance:	8Ω	8Ω	8Ω
尺寸（高×宽×深）Dimensions(HxWxD)	500x351x317 (mm)	571x398x365 (mm)	690x471x443 (mm)
重量Weight:	17Kg	21Kg	32.5Kg



应用领域 Applications:

◎剧院、剧场音乐厅、俱乐部和各种室内场所、演艺工程主扩音、酒吧、KTV、夜总会、会议室扩声设备和固定安装、流动演出音频系统、演出、庆典辅助音频系统



技术参数 Technical Parameters:

型号MODEL:	S18+	S218+
组件Components	LF 1 X18" (460mm)	LF 2 X18" (460mm)
连接器Connectors:	2XNEUTRIK NL4	2XNEUTRIK NL4
频率响应Frequency Response:	40Hz-120Hz ± 3dB	30Hz-150Hz ± 3dB
灵敏度Sensitivity(IW/1 M):	100dB	102dB
最大声压Maximum sound pressure:	130dB	132dB
额定功率RatedPower:	600W	1200W
最大功率 Maximum power:	1200W	2400W
覆盖范围H F Dispersion:	90° X55°	90° X55°
标称阻抗Nominallmpedance:	8Ω	4Ω
尺寸规格(高×宽×深)Dimensions:	690x561x595 (mm)	1066x561x780 (mm)

CV SERIES

专业会议音箱系列



描述 Description:

CV系列音箱是一款针对高档KTV会所设计的两分频全音域音箱。箱体是采用多层复合夹板，特殊喷涂制作。高质量单元配置，高强度夹板箱体，多吊挂点支撑配合，操作简易快捷，超长品质保证期：品质与信心的保证。适用于全音域扩声、高级卡拉OK包房、慢摇吧多功能厅、高级酒店会所流动商演、乐队扩声及舞台返送音箱。

CV series speakers are a two frequency, full range loudspeaker box designed for high-end KTV clubs. The box body is made of multilayer composite splint and special spraying. High quality unit configuration, high strength splint box, multi hanging point support, easy operation, long quality guarantee period: quality and confidence guarantee. It is suitable for all range loudspeaker, advanced Cara OK room, slow shake bar multi-function hall, senior hotel club mobile business performance, band loudspeaker and stage return speaker.

技术参数 Technical Parameters:

型号MODEL:	CV-1070	CV-1270	CV-1570
组件Components	LF 1X10"(300)	LF 1X12"(300)	LF 1X15"(300)
	HF 1X1.75(44mm)	HF 1X1.75(44mm)	HF 1X1.75(51mm)
连接器Connectors:	2XNEUTRIK NI4	2XNEUTRIK NI4	2XNEUTRIK NI4
频率响应Frequency Response:	83Hz-18KHz ± 3dB	83Hz-18KHz ± 3dB	83Hz-18KHz ± 3dB
灵敏度Sensitivity(IW/1 M):	98dB	98dB	101dB
最大声压Maximum sound pressure:	131dB	131dB	131dB
额定功率RatedPower:	350W	450W	550W
标称阻抗NominalImpedance:	8Ω	8Ω	8Ω
尺寸规格(H×W×D):	330X530X295mm	375X600X390mm	439X711X406mm

BK SERIES

专业会议音箱系列



描述 Description:

BK 系列是一款多边形内置三分频音箱，设计用于各种流动的语言和音乐扩音的应用场合，同样可以应用在各种固定安装场合，此梯形箱体侧边30°可做主扩也可做地面返送。结合一个内置无源分频器，分频器高频部分使用衰减电阻，不会出现大功率状态下烧高音的问题，同时增加了系统的阻尼系数和音响效率。提供6个M8吊挂点，用于固定安装和流动应用中吊挂和调节角度。并有一个35毫米支架孔座。

BK series is a multilateral ladder built-in three frequency speaker, designed for a variety of mobile language and music expansion applications, the same can be applied in a variety of fixed installation occasions, the side of the ladder side of the box 30 degrees can be used to do the ground to return to the ground. Combined with a built-in passive frequency divider, frequency divider high-frequency part of the use of bad reducing the resistance, will not appear in the high power state of the burning of the problem, while increasing the damping coefficient of the system and the sound field efficiency. Provides 6 M8 hanging points, for fixed and mobile application in suspension and adjust the angle. And there is a 35 mm bracket hole seat.

技术参数 Technical Parameters:

型号MODEL:	BK-610	BK-612
组件Components	LF 1X10"(300)	LF 1X12"(300)
	HF 4X3(14mm)	HF 4X3(16mm)
连接器Connectors:	2XNEUTRIK NI4	2XNEUTRIK NI4
频率响应Frequency Response:	83Hz-18KHz ± 3dB	83Hz-18KHz ± 3dB
灵敏度Sensitivity(IW/1 M):	95dB	98dB
最大声压Maximum sound pressure:	120dB	120dB
额定功率RatedPower:	220W	300W
标称阻抗NominalImpedance:	8Ω	8Ω
尺寸规格(H×W×D):	340X530X295mm	370X600X350mm



M SERIES

专业会议音箱系列

功能特点 Features:

M系列音箱外观简洁秀丽，是一款针对室内扩声，朴声的产品。音质纯正，干净，层次分明，有较高的还原度。适用于会议室，多功能厅，小面积房间，大房间朴声等场所。

M series speakers appearance is concise and beautiful, is a park in the indoor sound, sound products. Pure, clean, clean, structured, with a high degree of reduction. applyIn the conference room, multi-function hall, small area room, big room and so on.

技术参数 Technical Parameters:

型号MODEL:	M-108	M-110	M-112
组件Components	LF 1 X 8" (200mm)	LF 1 X10" (250mm)	LF 1 X12" (300mm)
	HF 1X1.0" (44mm)	HF 1X1.75" (44mm)	HF 1X1.75" (44mm)
连接器Connectors:	2XNEUTRIK NL4	2XNEUTRIK NL4	2XNEUTRIK NL4
频率响应Frequency Response:	83Hz-18kHz ± 3d	83Hz-18kHz ± 3d	83Hz-18kHz ± 3d
灵敏度Sensitivity(IW/1 M):	98dB	96dB	96dB
最大声压Maximum sound pressure:	123dB	126dB	129dB
额定功率RatedPower:	200W	280W	350W
覆盖范围H F Dispersion:	90° x 50°	90° x 50°	90° x 50°
标称阻抗Nominallmpedance:	8 Ω	8 Ω	8 Ω
尺寸规格(高×宽×深)Dimensions:	430x253x252 (mm)	560x325x340 (mm)	600x350x380 (mm)



CF SERIES

专业会议音箱系列

功能特点 Features:

CF系列是一款多边形内置二分频音箱，设计用于各种流动的语言和音乐扩音的应用场合，同样可以应用在各种固定安装场合，此梯形箱体侧边30°可做主扩也可做地面返送。

CF series is a multilateral ladder built-in two frequency speaker, designed for a variety of mobile language and music expansion applications, the same can be applied in a variety of fixed installation occasions, the side of the ladder side of the box 30 degrees can be used to do the ground to return to the ground.

技术参数 Technical Parameters:

型号MODEL:	CF-10	CF-12	CF-15
组件Components	LF 1x10" (250mm)	LF 1x12" (350mm)	LF 1x15" (380mm)
	H F 1x1.75" (44mm)	H F 1x1.75" (44.4mm)	HF-1x1.75" (44.4mm)
连接器Connectors:	2xNEUTRIK NL4	2xNEUTRIK NL4	2xNEUTRIK NL4
频率响应Frequency Response:	60Hz-20KHz ± 3dB	60Hz-20KHz ± 3dB	60Hz-20KHz ± 3dB
灵敏度Sensitivity(IW/IM):	98dB	98dB	98dB
最大声压Maximum sound pressure:	128dB	130dB	131dB
额定功率Rated Power:	300W	400W	450W
覆盖范围H F Dispersion:	90° x 50°	90° x 50°	90° x 50°
标称阻抗Nominallmpedance:	8 Ω	8 Ω	8 Ω
尺寸 (高×宽×深) Dimensions(HxWxD)	512x320x310 (mm)	625x390x380 (mm)	700x430x420 (mm)

OK SERIES

专业会议音箱系列



AQ SERIES

专业会议音箱系列

功能特点 Features:

OK系列是一款多边形内置二分频音箱，设计用于各种流动的语言和音乐扩音的应用场合，同样可以应用在各种固定安装场合，此梯形箱体侧边30°可做主扩也可做地面返送。

OK series is a multilateral ladder built-in two frequency speaker, designed for a variety of mobile language and music expansion applications, the same can be applied in a variety of fixed installation occasions, the side of the ladder side of the box 30 degrees can be used to do the ground to return to the ground.

技术参数 Technical Parameters:

型号MODEL:	OK-6	OK-8	OK-10A
组件Components	LF 1 X6.5"	LF 1 x8"	LF 1x10" (250mm)
	HF 1X3"	HF 1x 3"	HF 1x1" (34mm)
连接器Connectors:	2XNEUTRIK NL4	2xNEUTRIK NL4	2xNEUTRIK NL4
频率响应Frequency Response:	83Hz-18kHz ± 3d	53Hz-20kHz ± 3d	60Hz-20KHz ± 3dB
灵敏度Sensitivity(1W/1 M):	96dB	96dB	97dB
最大声压Maximum sound pressure:	126dB	126dB	119dB
额定功率RatedPower:	120W	180W	200W
标称阻抗Nominallmpedance:	8Ω	8Ω	8Ω
尺寸规格(H×W×D):	375x225x220(mm)	420x250x240(mm)	490x325x320(mm)

功能特点 Features:

AQ系列音箱外观简洁秀丽，是一款针对室内扩声，朴声的产品。音质纯正，干净，层次分明，有较高的还原度。适用于会议室，多功能厅，小面积房间，大房间朴声等场所。

AQ series speakers appearance is concise and beautiful, is a park in the indoor sound, sound products. Pure, clean, clean, structured, with a high degree of reduction. applyIn the conference room, multi-function hall, small area room, big room and so on.

技术参数 Technical Parameters:

型号MODEL:	AQ6	AQ8
组件Components	LF 1 X6.5"	LF 1 x8"
	HF 1X3"	HF 1x 3"
连接器Connectors:	2XNEUTRIK NL4	2xNEUTRIK NL4
频率响应Frequency Response:	83Hz-18kHz ± 3d	53Hz-20kHz ± 3d
灵敏度Sensitivity(1W/1 M):	96dB	96dB
最大声压Maximum sound pressure:	126dB	126dB
额定功率RatedPower:	120W	180W
覆盖范围H F Dispersion:	90° x 50°	90° x 50°
标称阻抗Nominallmpedance:	8Ω	8Ω
尺寸规格(高×宽×深)Dimensions:	349x220x200 (mm)	380x240x215 (mm)



CA SERIES

专业会议音箱系列

功能特点 Features:

CA 作为独立的全频音箱，免去了外置分频驱动的麻烦，高频压缩驱动器安装在一个持续指向性90度X50度号角上。高频号角可以转动，使得多角度的箱体既能水平放置也可以垂直放置。令系统更加简洁。适用于户外流动扩声系统，室内SHOW吧、慢摇吧及固定安装系统等场所使用。

CA as an independent full frequency speaker, eliminates the trouble of external frequency driver, high frequency compression driver installed in a continuous directivity of 90 degrees X50 degrees on the horn. The high frequency horn can be rotated, so that the multi angle box can be placed horizontally or vertically. Make the system more concise. Suitable for outdoor mobile sound reinforcement system, indoor SHOW it, shake it slow and fixed installation system etc..

技术参数 Technical Parameters:

型号MODEL:	CA-10	CA-12
组件Components	LF 1x10" (250mm)	LF 1x12" (300mm)
	HF 1x1" (34mm)	HF 1x1.75" (44mm)
连接器Connectors:	2xNEUTRIK NL4	2xNEUTRIK NL4
频率响应Frequency Response:	60Hz-20KHz ± 3dB	60Hz-18KHz ± 3dB
灵敏度Sensitivity(IW/IM):	97dB	98dB
连续声压Continuous sound pressure:	119dB	121dB
最大声压Maximum sound pressure:	125dB	126dB
额定功率Rated Power:	200W	300W
最大功率Maximum power:	500W	600W
覆盖范围H F Dispersion:	90° x 50°	80° x 50°
标称阻抗NominalImpedance:	8Ω	8Ω
尺寸（高×宽×深）Dimensions(HxWxD)	515x295x290 (mm)	640x390x395 (mm)
重量Weight:	15kg	21kg

型号MODEL:		
组件Components	LF 1x15" (380mm)	LF 1x15" (380mm)
	HF 1x1.75" (44mm)	HF 1x1.75" (44mm)
连接器Connectors:	2xNEUTRIK NL4	2xNEUTRIK NL4
频率响应Frequency Response:	50Hz-18KHz	50Hz-18KHz
灵敏度Sensitivity(IW/IM):	101dB	101dB
连续声压Continuous sound pressure:	129dB	129dB
最大声压Maximum sound pressure:	131dB	131dB
额定功率Rated Power:	350W	800W
最大功率Maximum power:	700W	1600W
覆盖范围H F Dispersion:	80° x 50°	80° x 50°
标称阻抗NominalImpedance:	8Ω	4Ω
尺寸（高×宽×深）Dimensions(HxWxD)	735x450x445 (mm)	1180x560x498 (mm)
重量Weight:	29kg	46kg

应用领域 Applications:

适用于大型厅堂，如多功能厅、中小型剧场、室内演艺等。

